LAS8001M

HEAVY DUTY

A slimline, mortised automatic drop seal for timber sliding doors. The end plate cleverly conceals a magnet which engages with a button in the frame, to assist the door closure and ensures the gasket remains in the dropped position without forcing the door open. The seal features a high efficiency mechanism, which lifts the seal clear of the floor as soon as the door is opened by a few millimetres; resulting in lower door operating forces.

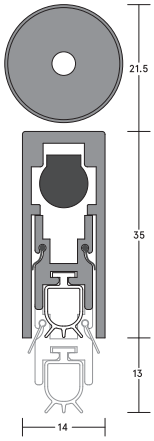

LAS8001M

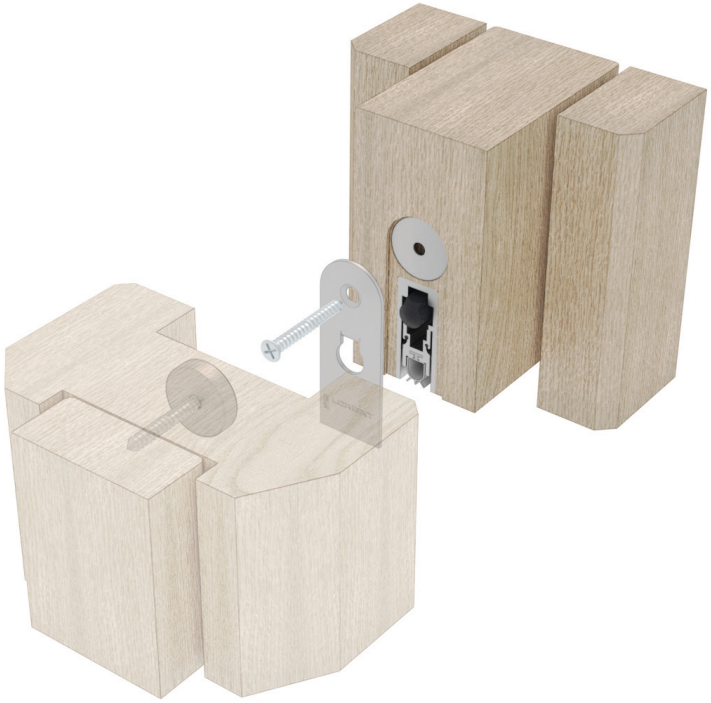

SYSTEM SPECIFICATIONS

Performance
- Protects against sound, smoke, draught, light and insects.
- Suitable for wheeled traffic.

Location
- Sliding doors.

Use with
- Any perimeter seal. Any threshold plate.

Min/max gap size
- 1mm/13mm.

Seal material
- Grey or black silicone rubber.

Standard lengths
- 335mm, 435mm, 535mm, 635mm, 735mm, 835mm, 935mm, 1035mm, 1135mm and 1235mm. Sizes above 1235mm are available on request.
- Note: Each length can be cut back to the next size down. The 335mm can be cut back to 255mm.

Fixing
- Fixing screws are supplied. This seal is mortised. Pre-drilled radiused end plates are supplied which also secure the product in place. (Square end plates available on request).
- Magnetised button is supplied to fix into the frame.

Adjustment
- Self-levelling on uneven surfaces. Can be adjusted independently of the fixing screws.

Finishes
- Silver anodised aluminium with silver end plates, and grey silicone rubber gasket.
- Silver anodised aluminium with bronze end plates, and black silicone rubber gasket.
- Chrome finish magnetised button.

T: +44 (0) 1626 834252
E: mktg@lorientuk.com

www.lorientgroup.com

LORIENT